

SET UP INSTRUCTIONS

Displays must include front facing 2'Wx8'H returns on each end.



VegasDisplay.com


702.399.9900

Emergency Help

702.580.8907



Watch the Set Up Video
SnapPanelDisplays.com
Click on link: "Set Up"

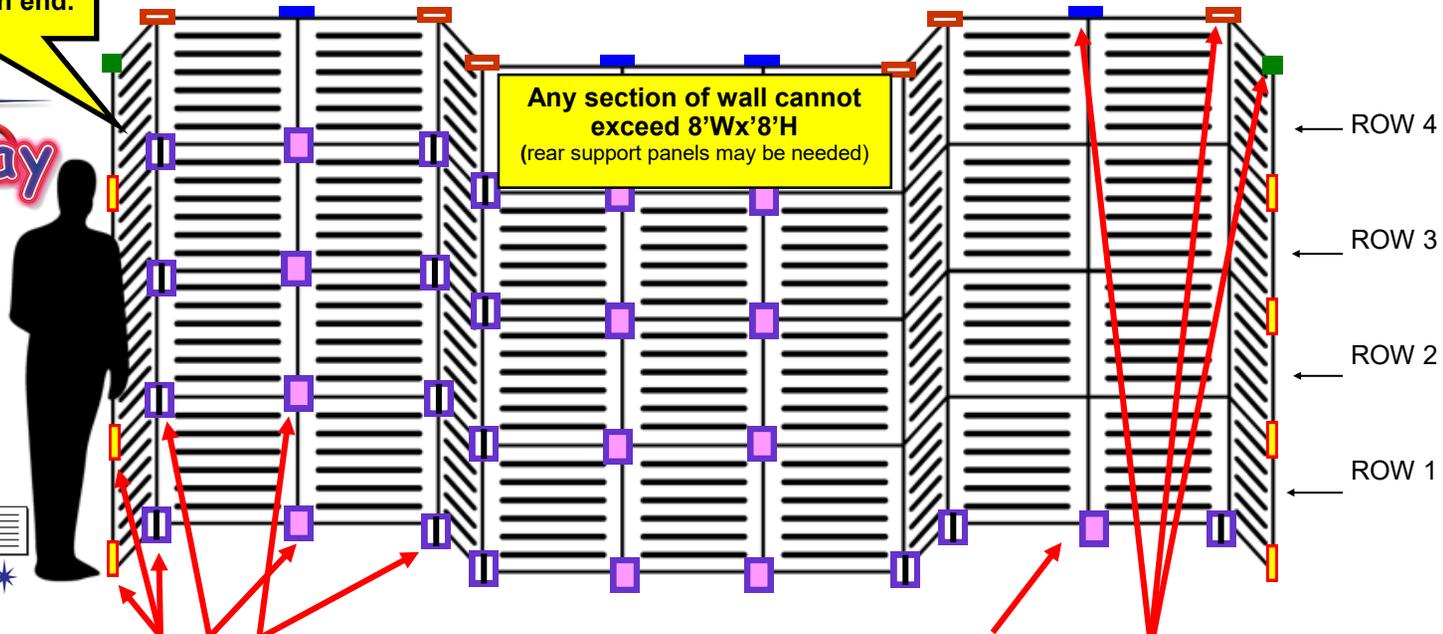

Steps 1 2 3 ... continue building one row at a time. Check stability of wall after each row.

Snap Panel CONNECTORS

-  **SIDE / EDGE**
-  **FULL HINGE**
-  **FULL STRAIGHT**
-  **TOP STRAIGHT**
-  **TOP HINGE**
-  **TOP CORNER**

Other Available Connectors

- "T" Connector
- "+" Connector

READ ALL THE INSTRUCTIONS BEFORE SET UP!

Rules for designing a Snap Panel Display.

- The display design, product placement and weight will determine the stability of the wall. Plan accordingly.
- A wall section must not exceed 8'Wx8'H and have a minimum of a 2'Wx8'H front facing return on each end.
- Adding 45°-90° wall angles will increase structural stability. The more angles, the sturdier the wall.
- When setting up the first row of panels, do not allow panels to "twist" or "lean" as connectors may break.

Set Up Instructions

- Examine the panels. You can use the slat or smooth side, or any combination you desire.
- Separate connectors by style and size. Noting the difference between TOP and END connectors.
- Build the first row, using FULL connectors on the bottom, creating a 1" gap between the panels and floor.
- Build the first row. Make any wall angle adjustments. Moving an fully built wall will damage the display.
- Add more rows of panels. After each row, check to be sure the display wall is sturdy and stable.

Displaying Product

When adding products to the display wall, start at the bottom of the display, spreading the weight evenly along the length of the wall. Gradually add more products with careful attention to wall stability and sturdiness.

Breakdown

When disassembling the display, start at a top corner and remove one panel and one row at a time.

Slatwall Display Connectors

Order connectors online @ SnapPanelDisplays.com



|| SIDE / EDGE

Use on sides of wall for a smooth edge. Use on bottom row of panels.



|| FULL HINGE

Connects panels together to form an angle in the wall. Use on bottom row of panels.



■ FULL STRAIGHT

Use to join two panels to create a straight wall. Use on bottom row of panels.



— TOP STRAIGHT

Use to join two panels at top of wall for a smooth top. Do NOT use on bottom row of panels.



— TOP HINGE

Use to join two hinged panels at top of wall. Do NOT use on bottom row of panels.



■ TOP CORNER

Use this connector on top corner of wall for a smooth edge. Do NOT use on bottom row of panels.


SPECIAL Snap Panel Connectors

Note: Many Display Kits do not include or require the connectors below



“T” Connectors

Use these “T” connectors to attach three panels together to create 90 degree angle off a straight wall. This connector is perfect to add stability to your display wall.

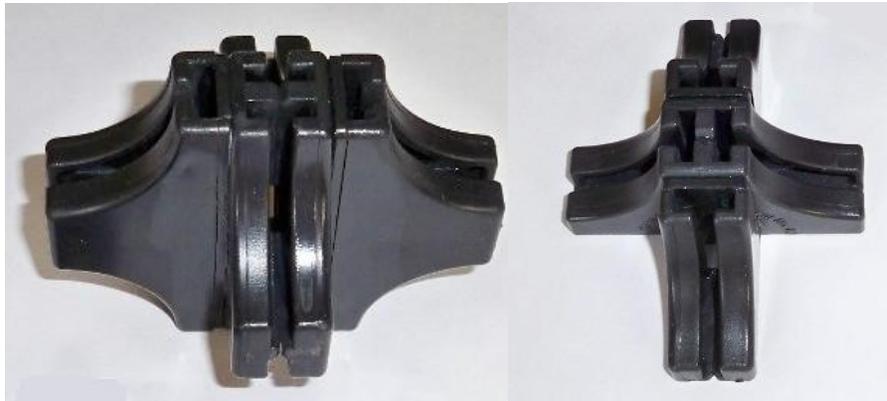

“+” Connectors

Use these “+” connectors to attach four panels together and creating 90 and 180 degree angles off a straight wall

Order connectors online
@SnapPanelDisplays.com

Call: 702.399.9900



Updated 2018