

READ INSTRUCTIONS BEFORE SET UP

SNAP PANEL DISPLAY SETUP INSTRUCTIONS

RULES & WALL STABILITY

- The display design, product placement, and weight determine the stability of the wall. Plan accordingly.
- A wall section must not exceed 8'W × 8'H and must have a minimum 2'W × 8'H front-facing return on each end. Rear support panels may be needed.
- Adding 45°–90° wall angles will increase structural stability. The more angles, the sturdier the wall.
- When setting up the first row, do not allow panels to “twist” or “lean,” as corners may break.

SETUP — STEP BY STEP

1. Examine the panels. Use the slat side, smooth side, or any combination you desire.
2. Separate connectors by style and size. Note the difference between TOP and END connectors.
3. Build the first row using FULL connectors on the bottom, creating a 1-inch gap between the panels and floor. Make any wall-angle adjustments.
4. Continue building one row at a time. After each row, check that the display wall is sturdy and stable. Moving a fully-built wall will damage the display.

DISPLAYING PRODUCT

- Start at the bottom of the display.
- Spread the weight evenly along the length of the wall.
- Gradually add more products, paying careful attention to wall stability and sturdiness.

BREAKDOWN

- Start at a top corner.
- Remove one panel and one row at a time.

NEED HELP OR A SETUP VIDEO?

snappaneldisplays.com • 702.399.9900

Emergency Help: 702-353-4267



SNAP PANEL CONNECTORS

Connector reference



SIDE / EDGE



FULL HINGE



FULL STRAIGHT



TOP CORNER



TOP HINGE



TOP STRAIGHT

ROW 1

Start with SIDE and FULL connectors on the bottom. Adjust angles after first row is complete.

ROW 2

Continue adding the side and full connectors.

ROW 3

Continue adding the side and full connectors.

ROW 4

Add top corner and top straight/top hinge connectors; confirm the display is sturdy and stable.

OTHER AVAILABLE CONNECTORS

“T” CONNECTOR — Attach three panels together to create a 90° angle off a straight wall. This connector is perfect to add stability to your display wall.

“+” CONNECTOR — Attach four panels together, creating 90° and 180° angles off a straight wall.

Note: Many Display Kits do not include or require these connectors.

Watch the Set Up Video
SnapPanelDisplays.com
Click on link: “Set Up”



SNAP PANEL SLATWALL DISPLAY CONNECTORS

Connector reference



SIDE / EDGE

Use on left and right sides of the wall for a smooth edge. Use on bottom row of panels, left and right corner.



FULL HINGE

Connects 2 or 4 panels together to form an angle in the wall. Use on bottom row of panels where 2 panels angle. .



FULL STRAIGHT

Use to join 2 or 4 panels to create a straight wall. Use on bottom row of panels where 2 panels are straight.



TOP CORNER

Use this connector on top corner left and right for a smooth edge. Do NOT Use on the bottom row of panels.



TOP HINGE

Use to join two angled panels at top of the wall. Do NOT Use on the bottom row of panels.



TOP STRAIGHT

Use to join two straight panels at the top of wall for a smooth top. Do NOT use on the bottom row of panels.


Snap Panel Slatwall Display Connectors

Order connectors online @SnapPanelDisplays.com

Updated 2026



Scan for video tutorial.

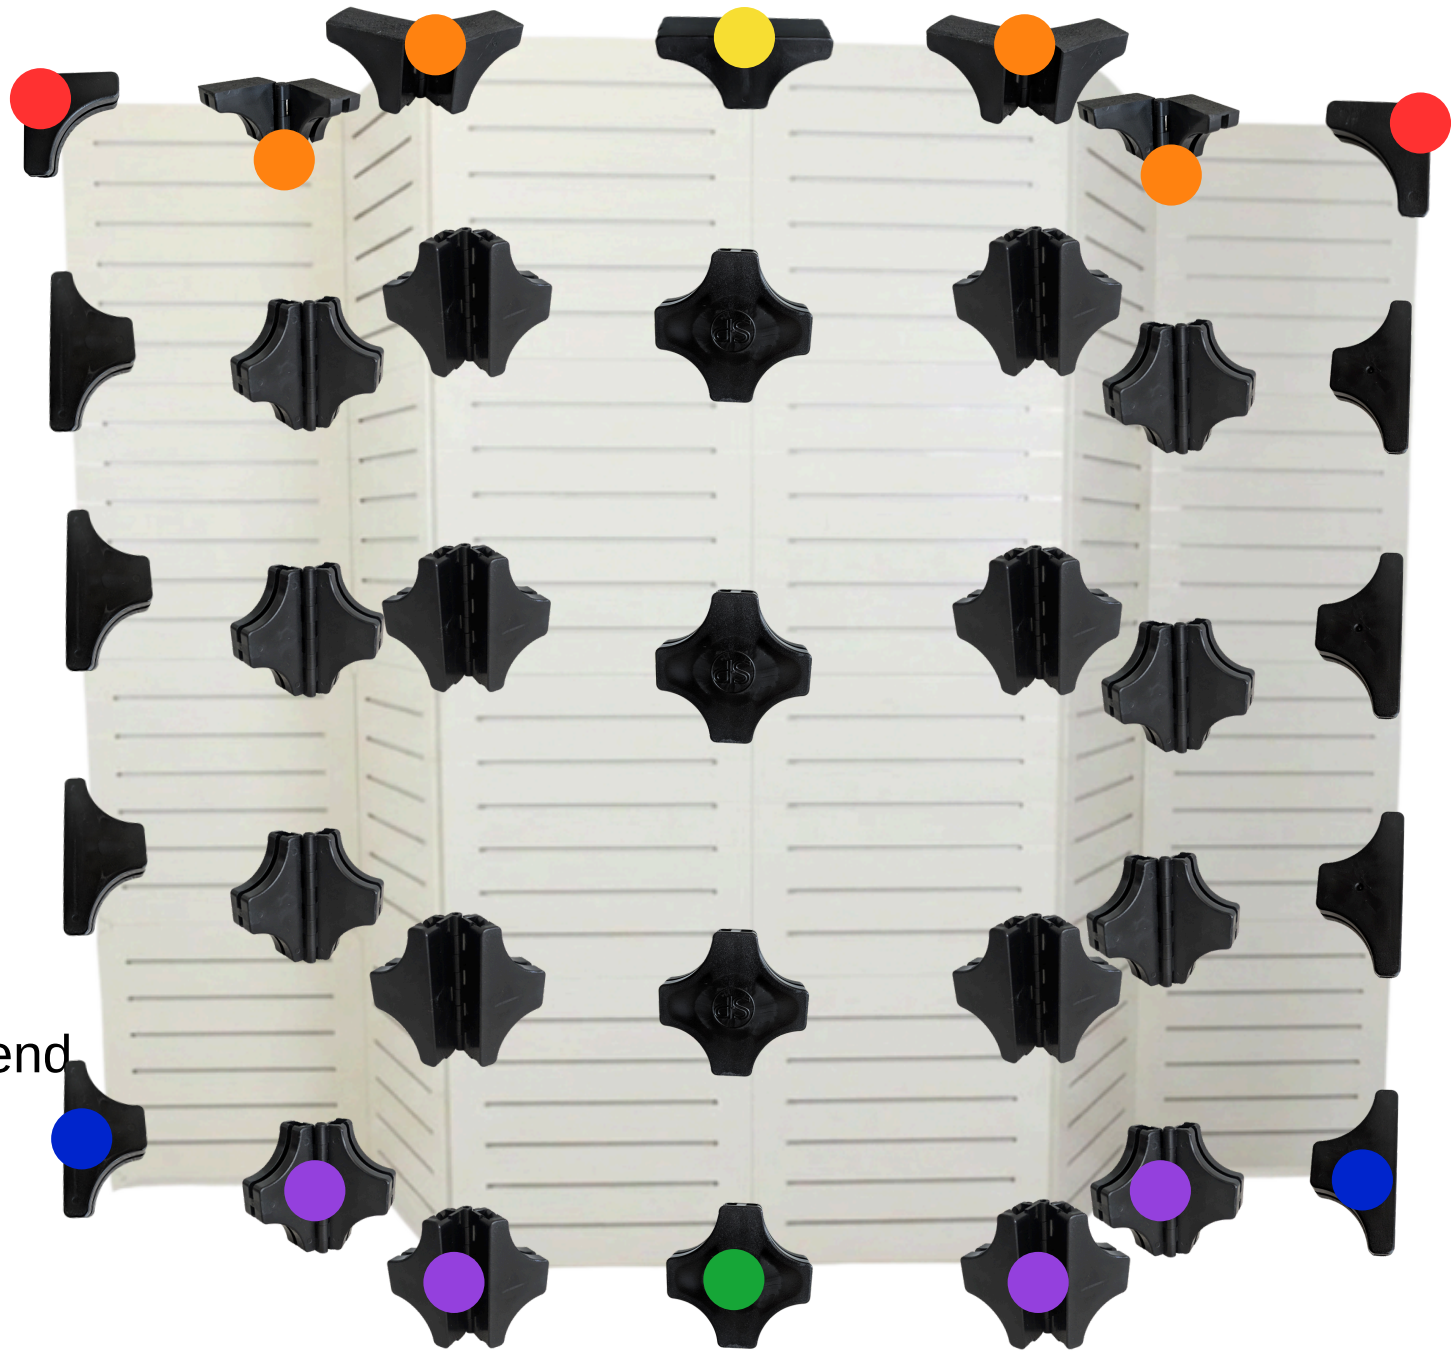

Color Code Legend

- Top Corner
- Full Hinge
- Full Straight
- Top Hinge
- Side Edge
- Top Straight